

Specifikacija opreme za model FILING - Stirofly

1. BREZKRTAČNI MOTOR



AX-1806C-2150	Factory Spec.	Stator:	Test Data.
Micro brushless motor	Kv: 2150rpm/v Lipo Range: 2-3 cell Poriporočljiv propeler prop: 5x3~6x3 Best current range: 3~7A Teža: 26g Os: 3mm	18 x 6mm	Battery: 11.5v Current: 7.2A Propeller: 5x3 Thrust: 337g Speed: 18570rpm

2. REGULATOR ZA BREZKRTAČNI MOTOR



Plush 10A Brushless Speed Controller

The Plush series of ESC are a very good quality controller with a broad range of programming features and smooth throttle response compared to other BECs in the same price range.

These escs have linear throttle curve and can handle 10A continuously.

Stalen tok: 10A
Max. Tok: 12A
BEC Mode: Linear

BEC : 5v / 2A

Lipo Celice: 2-4 S

NiMH : 5-12

Teža: 9g

Velikost: 27x17x6mm


Krmilnik je programabilen, s pomočjo komandne ročice za plin ali preko programske kartice.

3. LiPo CELICE



Kapaciteta : 610mAh
Konstantno praznjenje: 20C
Burst rate: 30C (15sec)
Konfiguracija : 2S 7.4v
Velikost: 52x10x30mm
Teža : 35g

4. SERVOMOTORJI XTX500

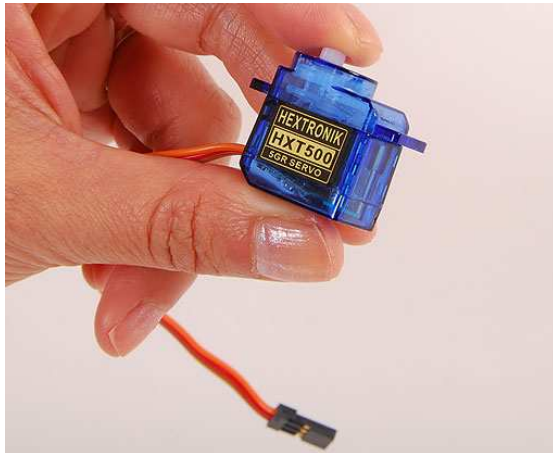

Velikost : 22.9x11.4x22 mm / 0.9x0.45x0.87 in
Napetost : 3v ~ 6v
Teža: 5g / 0.18oz
Hitrost : 0.10 sec/60(4.8V)
Navor : 0.8 kg-cm
Temperaturno območje : -30C~60C

5. PROPELER IN SPINER

Folding Propeller w/ Alloy hub - 7.5x4



Folding Propeller w/ Alloy hub - 7.5x4
Machined alloy hub.
2~2.3mm Colet style shaft adapter.
Teža: 24g

VSE KOMPONENTE SKUPAJ, KI PRIDEJO ZMONTIRANE V MODEL.

