

## Specifikacija opreme za model FILING - Stirofly

### 1. BREZKRTAČNI MOTOR



AX-1806C-2150	Factory Spec.	Stator:	Test Data.
Micro brushless motor	Kv: 2150rpm/v Lipo Range: 2-3 cell Poriporočljiv propeler prop: 5x3~6x3 Best current range: 3~7A Teža: 26g Os: 3mm	18 x 6mm	Battery: 11.5v Current: 7.2A Propeller: 5x3 Thrust: 337g Speed: 18570rpm

### 2. REGULATOR ZA BREZKRTAČNI MOTOR



#### **Plush 10A** Brushless Speed Controller

The Plush series of ESC are a very good quality controller with a broad range of programming features and smooth throttle response compared to other BECs in the same price range.

**These escs have linear throttle curve and can handle 10A continuously.**

Stalen tok: 10A  
Max. Tok: 12A  
BEC Mode: Linear

**BEC : 5v / 2A**

Lipo Celice: 2-4 S

NiMH : 5-12

Teža: 9g

Velikost: 27x17x6mm


Krmilnik je programabilen, s pomočjo komandne ročice za plin ali preko programske kartice.

### 3. LiPo CELICE



Kapaciteta : 610mAh  
Konstantno praznjenje: 20C  
Burst rate: 30C (15sec)  
Konfiguracija : 2S 7.4v  
Velikost: 52x10x30mm  
Teža : 35g

### 4. SERVOMOTORJI XTX500

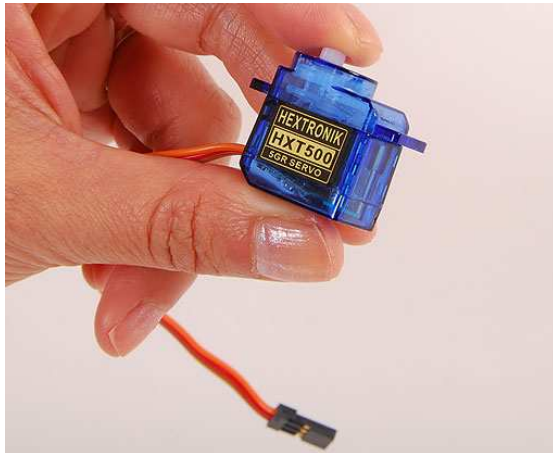

Velikost : 22.9x11.4x22 mm / 0.9x0.45x0.87 in  
Napetost : 3v ~ 6v  
Teža: 5g / 0.18oz  
Hitrost : 0.10 sec/60(4.8V)  
Navor : 0.8 kg-cm  
Temperaturno območje : -30C~60C

## 5. PROPELER IN SPINER

### Folding Propeller w/ Alloy hub - 7.5x4



Folding Propeller w/ Alloy hub - 7.5x4  
Machined alloy hub.  
2~2.3mm Colet style shaft adapter.  
Teža: 24g

**VSE KOMPONENTE SKUPAJ, KI PRIDEJO ZMONTIRANE V MODEL.**

